

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE****ISO-7637-2:2004 PULSE #2B & OEM EQUIVALENT****1. PURPOSE**

- 1.1. To provide specific test method setup configuration instructions in full compliance with OEM specifications and international standards.

2. SCOPE

- 2.1. To establish consistency and repeatability in test method results using the equipment and technical resources available in EMC laboratory inventory.

3. RESPONSABILITY

- 3.1. EMC laboratory authorized personnel.
See **201709 EMC LAB TEST EQUIPMENT COMPETENCY MATRIX** and **201705 EMC LAB COMPETENCY MATRIX**.

4. EQUIPMENT & MATERIALS

- 4.1. All test equipment that requires calibration shall be within its calibration period and shall be traceable to A2LA certified labs. EMC lab personnel must ensure that certificates of calibration are obtained when equipment is sent out for calibration or repair. (See *REFERENCES* section in document for equipment specific internal procedures and records).
- 4.2. **Power supply**
 * Ri of less than 0,01 Ω d.c.
 * Zi = Ri for frequencies less than 400 Hz.
 * output deviation ≤ 1 V from 0 to maximum load (including inrush current) and shall recover 63% of its maximum excursion within 100 μ s.
 * superimposed ripple voltage Ur $\leq 0,2$ V peak-to-peak and shall have a minimum frequency of 400 Hz.
 * simulates the low internal impedance of the battery
 * battery voltages 13,5 V and 27 V, respectively.
- 4.3. **Oscilloscope:**
 * digitizing oscilloscope (single sweep sampling rate ≥ 2 GHz/s, bandwidth 400 MHz, input sensitivity: at least 5 mV/div.)
 * analog storage oscilloscope may be used if:
 - bandwidth d.c. to at least 400 MHz;
 - writing speed of at least 100 cm/ μ s;
 - input sensitivity of at least 5 mV/division.
- 4.4. **Voltage probe:**
 * attenuation of 100/1,
 * maximum input voltage of at least 1 kV,
 * input impedance Z and capacitance C according to Table 2 ;
 * maximum probe cable length of 3 m;
 * maximum probe ground length of 0,13 m.
- | f[MHz] | z[k Ω] | C[pF] |
|--------|----------------|-------|
| 1 | >40 | <4 |
| 10 | >4 | <4 |
| 100 | >0.4 | <4 |
- 4.5. **Test pulse generator:**
 * peak voltage U_s tolerance of +10% / -0%
 * timing (t) tolerance of $\pm 20\%$
 * internal resistance (Ri) tolerance of $\pm 20\%$

EMC LABORATORY
213 Harry Walker Parkway South
NEWMARKET, ON, L3Y 8T3
Tel: 905-952-1242

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

Fig.4-1



Technical data	VDS 200B2
Output voltage	0V – 60V
Output current continuous	0A – 50A
Output current peak	100A for max 500ms
Source impedance	Z _q = < 10mΩ
Bandwidth	DC to 30kHz for V _{pp} max 12V

Test Routines for arbitrary waves	
DC source	60V / 15A//30A//50A//100A//150A//200A
Functions	1. Sine Wave 2. Jump Start 3. Extern 4. GM 9105P Pulse 4 5. Drop and Jump pulse
Standard Test Routines	1. ISO 7637 2. ISO 16750-2 3. Jaso Test 1

Tbl.4-1

Idx	Equipment Description	Model	Maker	INV#
1.	Coupling Network	CNA200B2	EMTEST	2167
2.	Pulse #2b & #4 Voltage Dump Simulator	VDS200B2	EMTEST	2171
3.	Power Supply 0V – 60V, 0A – 50A	VDS200B2	EMTEST	2171
4.	Oscilloscope	TDS784A	TEKTRONIX	2161
5.	Voltage probe	CNA200B2	TEKTRONIX	2167
6.	ISMISO software	Rev 4.22	EMTEST	2176



**FLEXTRONICS
LABORATORY MANAGEMENT SYSTEM**

DOC # 705304-113

REVISION # C

SUPERSEDE B

RELEASE DATE 2010-04-22

DOC TYPE WORK INSTR

EMC LABORATORY
213 Harry Walker Parkway South
NEWMARKET, ON, L3Y 8T3
Tel: 905-952-1242

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

5. SUMMARY OF TEST METHOD

- 5.1. Evaluates DUT's immunity from conducted transients on power and control circuits connected directly to the vehicle's battery or indirectly by a switch or load (e.g. pull-up resistor).
- 5.2. The switching of inductive loads connected to the battery supply of vehicles creates both positive and negative pulses which electronics connected to the battery supply must be able to withstand. An example of transient would be the release of stored energy during the operation of a relay and/or other loads connected to the battery while starting and/or turning off the vehicle.

6. SAFETY PRECAUTIONS

- 6.1. Only EMC laboratory personnel mentioned in 201709 EMC LAB TEST EQUIPMENT COMPETENCY MATRIX is allowed to handle the EMTEST equipment.

7. TEST PLAN

- 7.1. For FlexAutomotive products the EMC test plan is generated using LMS004 and OEM template.
- 7.2. The test plan should indicate:
 - 1) DUT, harness, I/O loads configuration and position relative to ground plane.
 - 2) DUT activation and monitoring method, expected FPSC, and pass/fail criteria.
- 7.3. In the absence of an EMC test plan use information provided by the test requester in 201696 INTERNAL TEST REQUEST FORM. This approach is applicable for "engineering development" testing.

8. RECORDS


- 8.1. **Test reports** including plots and data files are saved over the LAN in a dedicated folder:
\\nmknt062\apps\le-ecn\emclab\result\project#\job#\test group
Example of grouping test results per job#: CTI, CTE, RE, CE, BCI, ESD, TP, PT, TRENDS.
- 8.2. In a similar manner the EMC **test plans** (TP), **proficiency testing** (PT), **trends** are stored under a **project#\job#** folder.
- 8.3. The intranet application EMC LAB SCHEDULER database is used to maintain and provide fast access to testing related records. The application is available via this link: **<http://nmknt063/emclab/labscheduler/>**

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

9. TEST SETUP

- 9.1. Prior to start testing all samples must be labeled per 900712 EMC LAB LABELS. The default list of required equipment is pull-out at the time the test method is selected (721179 EMC LAB, TEST REPORTS DATABASE).
- 9.2. A default list of required equipment is pull-out at the time the test method is selected (721179 EMC LAB, TEST REPORTS DATABASE).
- 9.3. The EMC test operator must ensure the testing is carried out based on the latest OEM specifications. In case of conflict the following documents may over-ride this procedure in order:
 - 1) The latest revision of OEM specification (including corrections).
 - 2) OEM approved EMC test plan, which can over-ride the OEM specification.

Fig.9-1

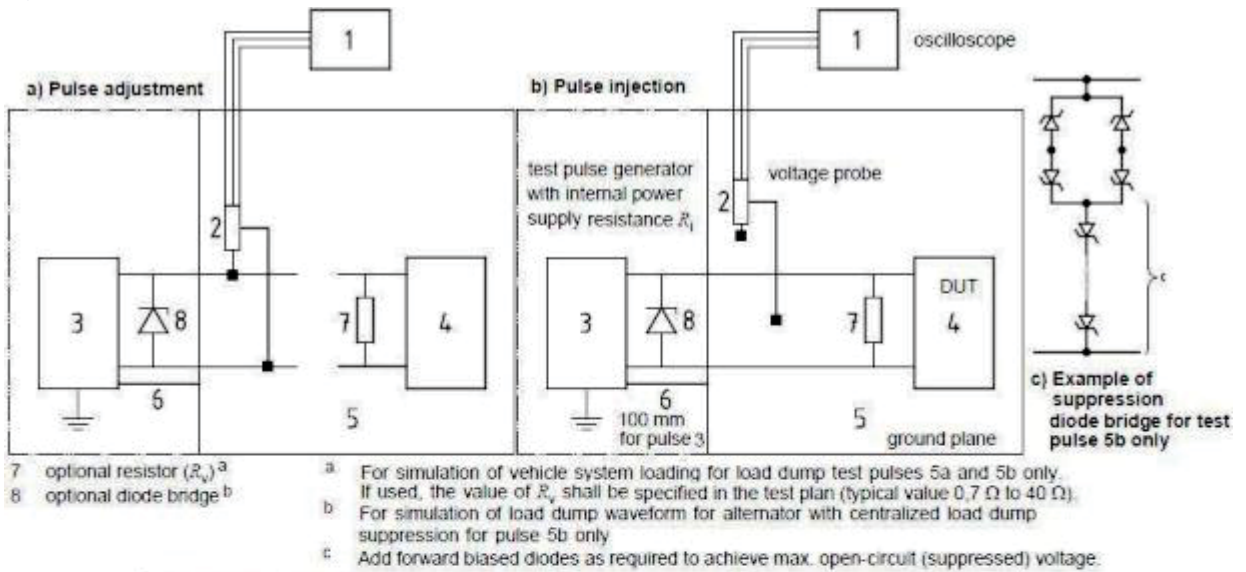

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

Tbl.9-1

	Pulse Verification 12/24 V	U_s	t_r	t_d
1.	Pulse 2a - No load	+ 50 V ± 5 V		50 μs ± 10 μ
2.	Pulse 2a - 2 Ω load	+ 25 V ± 5 V	1 (+0/- 0,5) μs	12 μs ± 2,4 μ
3.	Pulse 2b - No load and 0,5 Ω load	+ 10 V ± 1 V (12 V system)	1 ms ± 0,5 ms	2 s ± 0,4 s
4.	Pulse 2b - No load and 0,5 Ω load	+ 20 V ± 2 V (24 V system)	1 ms ± 0,5 ms	2 s ± 0,4 s


**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

10. ISO-7637-2:2004 PULSE#2B

- 10.1. Pulse 2b simulates transients from d.c. motors acting as generators after the ignition is switched off. (see ISO7637-2:2004 Annex F).
- 10.2. ISO-7637-2 does not mention for pulse#2b to place the DUT and/or harness on an insulator 5 cm above the ground plane.
- 10.3. $U_A = 13.5 \pm 0.5 \text{ V}$ (12 V system), $27 \pm 1 \text{ V}$ (24 V system).

Fig.10-1

**Figure 7 — Test pulse 2b
12 V system**

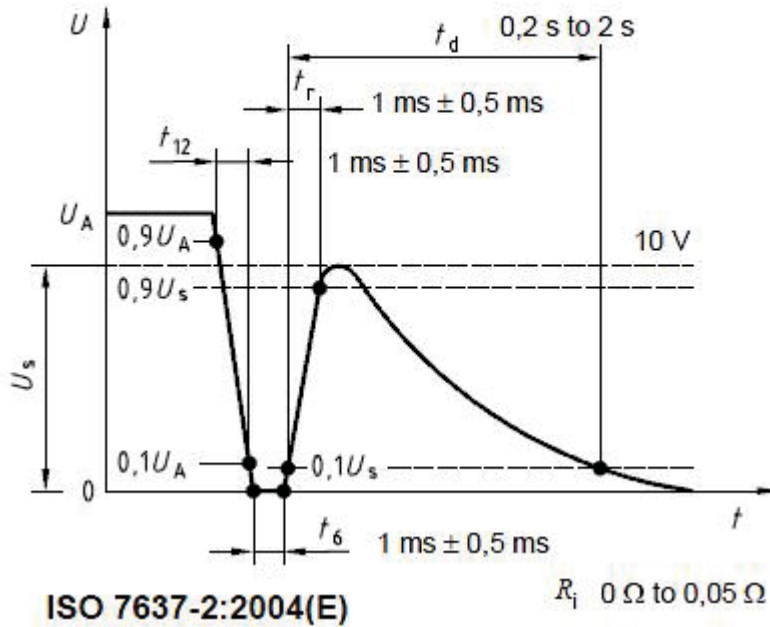



**FLEXTRONICS
LABORATORY MANAGEMENT SYSTEM**

DOC # **705304-113**

REVISION # **C**

SUPERSEDE **B**

RELEASE DATE **2010-04-22**

DOC TYPE **WORK INSTR**

EMC LABORATORY
213 Harry Walker Parkway South
NEWMARKET, ON, L3Y 8T3
Tel: 905-952-1242

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

11. DC10614:2005 (ISO-7637-2:2004 PULSE#2B NOT REQUIRED)

11.1. N/A

12. DC11224:2007 (ISO-7637-2:2004 PULSE#2B NOT REQUIRED)

12.1. N/A

13. CS-11809:2009 (ISO-7637-2:2004 PULSE#2B NOT REQUIRED)

13.1. N/A

14. CS-11979:2010 (ISO-7637-2:2004 PULSE#2B NOT REQUIRED)

14.1. N/A

15. ES-XW7T-1A278-AC:2003 (ISO-7637-2:2004 PULSE#2B NOT REQUIRED)

15.1. N/A

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

16. EMC-CS-2009:2010 PULSE#F2

16.1. Pulse F2 simulates the interruption in current to brush commutated motor, which is low-side switched. The test pulse is equivalent to test pulse 2B delineated in ISO 7637-2. Application of this test pulse is limited only for power supply circuits and only for components required to meet the ESA requirements of European directive 72/245/EEC.

Fig.16-1

EMC-CS-2009.1 Figure D-8: CI 220 Pulse F2 Pulse Characteristics

Pulse F2 - Parameters

U_p	13,5 V
U_s	10 V
t_r	$1 \pm 0,5$ ms
t_f	$1 \pm 0,5$ ms
t_b	$1 \pm 0,5$ ms
t_d	0.2 - 2 s
R_l	< 0.5 ohms

Parameters listed are for open circuit conditions.

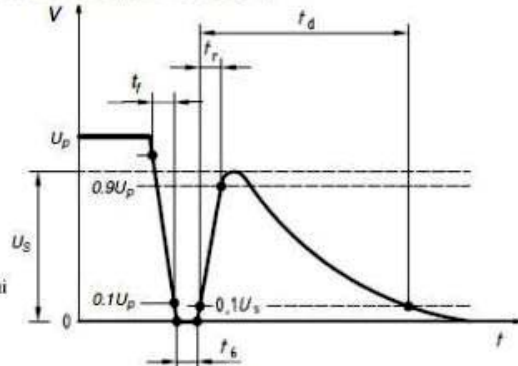


Figure 16-1: CI 220 Test Setup for Devices with a Single Power Supply Circuit

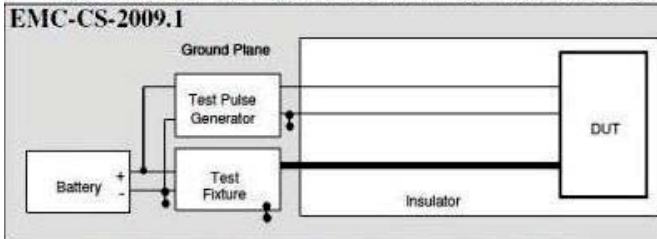


Figure 16-2: CI 220 Test Setup for Devices with Two Power Supply Connections

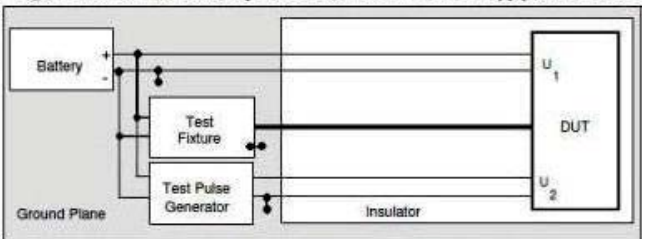


Figure 16-3: CI 220 Test Setup for Devices with Input Circuits

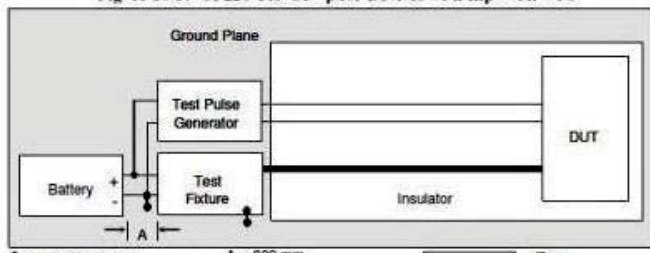


Figure 16-4: CI 220 Test Setup Detail (Input Circuits with Remote External Pull-Up Resistor)

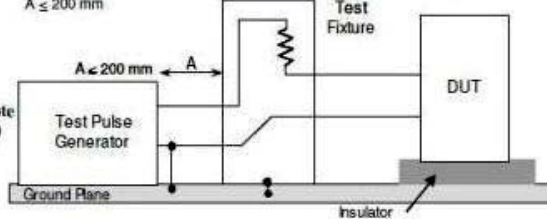


Figure 16-6: CI 220 Test setup for Application of Pulse G2


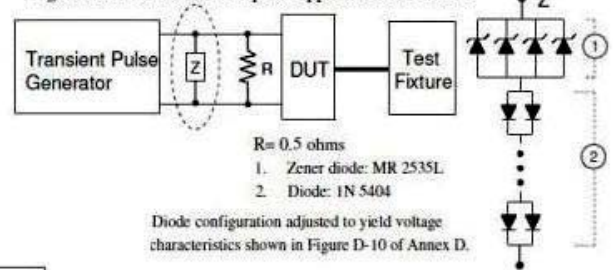


Figure 16-5: CI 220 Test Setup for Application of Pulse G1



EMC LABORATORY
213 Harry Walker Parkway South
NEWMARKET, ON, L3Y 8T3
Tel: 905-952-1242

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

17. GMW3097:2006 PULSE #2B

- 17.1. GMW3097:2006 3.5.2 CI, Transients on Power Lines applies to battery+ (B+) and switched battery lines (e.g. Ignition, Accessory). It also applies to I/O lines that are connected to an inductive load, where that load is fed by B+ or switched battery. The test pulses shall be applied to B+, each switched battery line and I/O lines fed by either B+ or switched battery separately. In addition, B+ and switched battery lines and I/O lines fed by either B+ or switched battery shall be tested simultaneously.
- 17.2. • Perform the test using pulses 1, 2a, 2b, 3a, 3b, and 4 in accordance with ISO 7637-2.
• Pulse 1 and 2b are only applicable to switched battery lines.

Fig.17-1 GMW3097:2006 Table 18: Requirements Levels for the Immunity to Transients on Power Lines

Pulse No.	Level	Minimum Number of Pulses or Application Time	Pulse Cycle Time		Comments
			(min.) default	(max.)	
1	-150 Vpeak	500 pulses	0.5 s <small>Note 1</small>	5 s	One or more functions of the DUT can go beyond specified tolerance as long as all functions return within normal limits after the exposure is removed. Memory functions shall perform as designed
2a	+50 Vpeak	500 pulses	0.5 s	5 s	2Ω transient generator internal source impedance
2b	+10 Vpeak	10 pulses	0.5 s <small>Note 1</small>	5 s	There shall be 10 pulses, beginning at 200 ms pulse width, then increasing pulse width by 200 ms steps until 2000 ms is achieved
3a	-200 Vpeak	10 minutes	90 ms	110 ms	Injection level established into a 50 ohm load (as opposed to the open-circuit measurement as specified in ISO 7637-2)
3b	+100 Vpeak	10 minutes	90 ms	110 ms	Injection level established into a 50 ohm load (as opposed to the open-circuit measurement as specified in ISO 7637-2)
4	See Table 19	1 pulse of each severity level	0.5 s	15 s	Voltage levels and Performance Criterion for Pulse 4 (crank pulse) see Table 19.
5b	(34 +0/-1) Vpeak	10 pulses	15 s	2 min	No permanent DUT performance deviations shall be observed after exposure to a load dump pulse with a suppressed open circuit voltage of (34 +0/-1) V, Ri=2Ω
7	-50 Vpeak	500 pulses	0.5 s	5 s	2Ω transient generator internal source impedance

Note 1: the minimum time must be long enough for the DUT's return to normal operation.

Table 16: Open Circuit Load Dump Pulse Parameters Specifications

Parameter	Unsuppressed	Suppressed
Transient Amplitude	+100 V ± 10%, (U _s + U _d)	(+34 +0/-1) V, (U _s + U _d)
t _d	400 ms ± 30%	400 ms ± 30%
t _r	≤ 10 ms	≤ 10 ms

Table 17: Two Ohm Loaded Load Dump Voltage Pulse Parameter Specifications

Parameter	Suppressed
U _s + U _s *	(+34 +0/-1) V

Figure 4: Setup for Pulse 7 (Simulation of Wiper Motor Switching Transient)

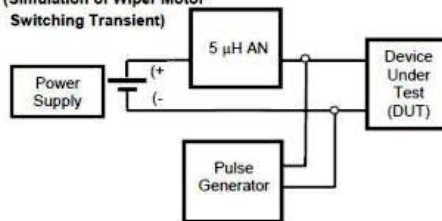


Table 19: Requirements Levels for the Immunity to Pulse 4: Crank Pulse

Pulse Severity	U _s <small>Note 1</small>	U _d <small>Note 1</small>	t ₀ <small>Note 1</small>	t ₁₁ <small>Note 1</small>	Performance Criterion
I	4 V	2.5V	1 s	40 ms	One or more functions of the DUT can go beyond specified tolerance as long as all functions automatically return within normal limits after the exposure is removed. Memory functions and functions required to start an engine shall perform as designed.
II	5 V	3 V, 2.5 V	2 s	60 ms	
III	6 V	4 V, 3 V, 2.5 V	5 s	80 ms	
IV	7 V	5 V, 4 V, 3 V, 2.5 V	10 s	100 ms	


t₀, t₀ and t_r as defined in ISO 7637-2. Default value for t_r shall be 15 ms. Default value for t₀ shall be 50 ms. All severity levels shall be tested.

Note 1: As defined in ISO 7637-2.

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

18. REPORT

18.1. Report pulse parameters, severity level, and DUT FPSC response. Include pulse verification waveform (no load, $U_A = 13.5 \pm 0.5$ V) acquired prior to test and test setup pictures, order of injection for each of the waveform amplitudes, number (repetitions) of the pulse applied, pulse period (interval between pulses), any deviation from a standard pulse waveform, point of application of pulse (pin number, letter, or name), exact characteristics of any disturbance during injection of the pulse.

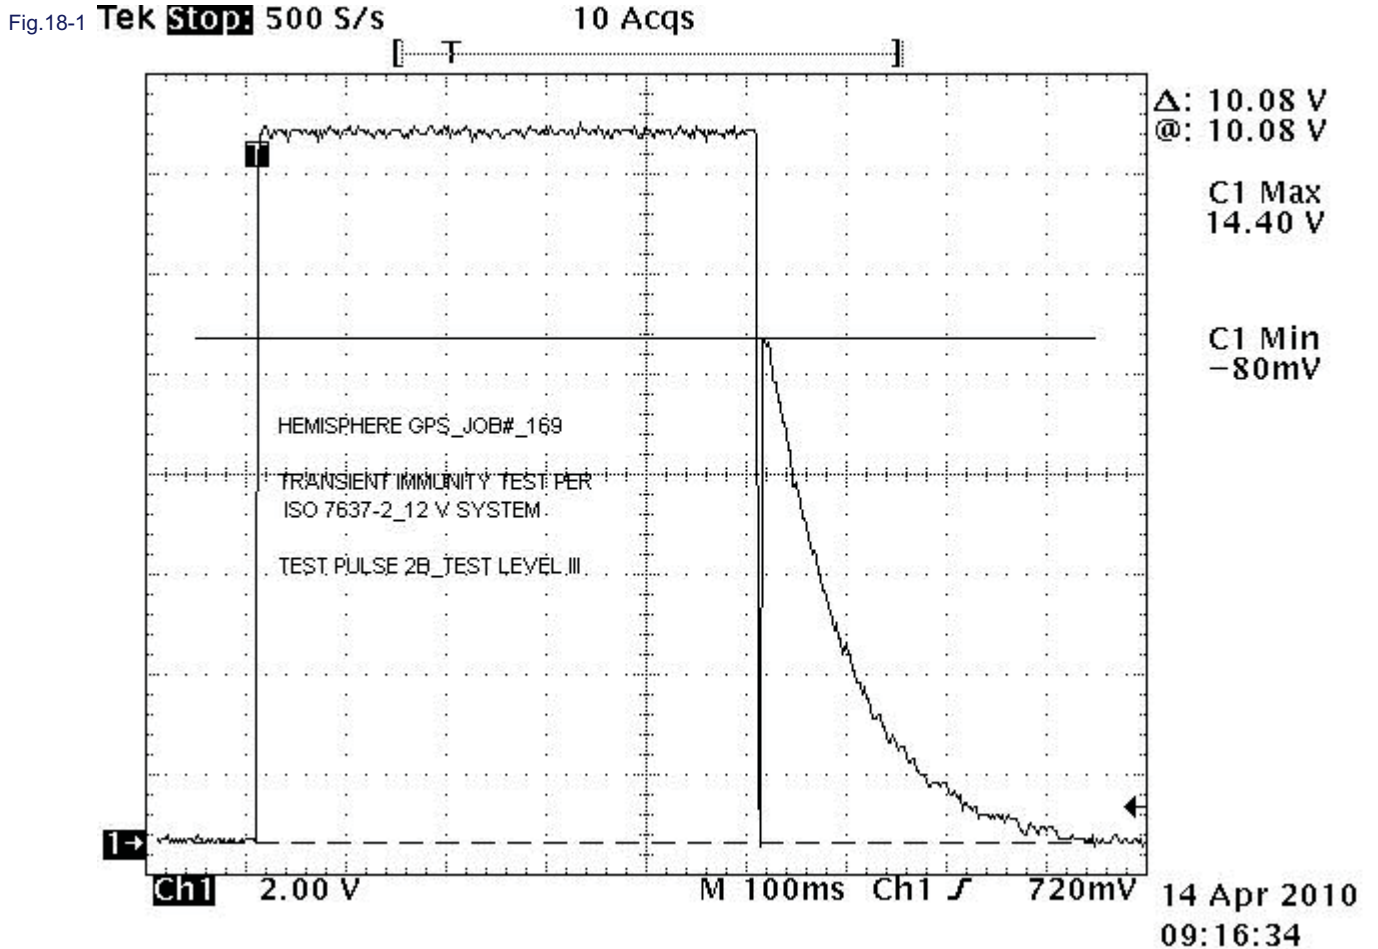

Tbl.18-1

Parameter	12V system	Tolerance
1. U_s	10.08 V	+ 10 V \pm 1 V
2. R_i	0 Ω	0 Ω to 0.05 Ω
3. t_d	0.22 s	0.2 s to 2 s
4. t_r	1 ms	1 (\pm 0.5) ms
5. t_{12}	1 ms	1 (\pm 0.5) ms per test plan
6. t_6	1 ms	1 (\pm 0.5) ms
7. U_A	14V	13.5 \pm 0.5 V

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

19. PROFICIENCY TESTING

19.1. Follow instructions and scheduler provided in LMS011 EMC LAB PROFICIENCY TESTING PROGRAM and ISO-7637-2:2004 Annex-D (Test pulse generator verification procedure).

19.2. $U_A = 0V$.

Tbl.19-1

Pulse Verification	U_s	t_r	t_d
1. Pulse 2a - No load (12/24 V system)	+ 50 V ± 5 V	1 (+0/- 0,5) µs	50 µs ± 10 µs
2. Pulse 2a - 2 Ω load (12/24 V system)	+ 25 V ± 5 V	-	12 µs ± 2,4 µs
3. Pulse 2b - No load and 0,5 Ω load	+ 10 V ± 1 V (12 V system)	1 ms ± 0,5 ms	2 s ± 0,4 s
4. Pulse 2b - No load and 0,5 Ω load	+ 20 V ± 2 V (24 V system)	1 ms ± 0,5 ms	2 s ± 0,4 s

20. TRENDS

20.1. Follow instruction provided in 721179 EMC LAB, TEST REPORTS DATABASE and 721186 EMC LAB, TRENDS AND STATISTICS.

21. DEFINITIONS

21.1. Use definitions per ISO 7637-1.

21.2. FPSC = Function Performance Status Classification

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

REFERENCES

LMS007			EMC LAB, EQUIPMENT CONTROL
LMS011			EMC LAB, PROFICIENCY TESTING PROGRAM
201707			EMC LAB, APPROVED EQUIPMENT SUPPLERS LIST
201711			EMC LAB, EQUIPMENT INVENTORY
201728			EMC LAB, APPROVED CALIBRATION SUPPLIERS LIST
201709			EMC LAB, TEST EQUIPMENT COMPETENCY MATRIX
201705			EMC LAB, COMPETENCY MATRIX
201696			INTERNAL TEST REQUEST FORM
900712			EMC LAB LABELS
721179			EMC LAB, TEST REPORTS DATABASE
721186			EMC LAB, TRENDS AND STATISTICS
201724			CALIBRATION SUPPLIER EVALUATION FORM
ISO 7637-1	2-nd Ed	Mar 15, 2002	<i>Road vehicles - Electrical disturbances from conduction and coupling - Part 1: Definitions and general considerations</i>
ISO 7637-2	2-nd Ed	Jun 15, 2004	<i>Road vehicles — Electrical disturbances from conduction and coupling — Part 2: Electrical transient conduction along supply lines only</i>
DC-10614	B	Dec 1, 2005	<i>EMC Performance Requirements --- Components</i>
DC-11224	A	Jun 1, 2007	<i>EMC Performance Requirements --- Components</i>
CS-11809	A	May 29, 2009	<i>ELECTRICAL AND EMC PERFORMANCE REQUIREMENTS - E/E COMPONENTS</i>
CS-11979	A	Apr 13, 2010	<i>CHRYSLER/FIATELECTRICAL AND EMC PERFORMANCE REQUIREMENTS - E/E COMPONENTS</i>
ES-XW7T-1A278-AC & corrections	AC	Oct 10, 2003	<i>Component and Subsystem Electromagnetic Compatibility, Worldwide Requirements and Test Procedures</i>
EMC-CS-2009.1	1	Feb 11, 2010	<i>Electromagnetic Compatibility Specification For Electrical/Electronic Components and Subsystems</i>
SAE J1113-11		Jun 2007	<i>Immunity to Conducted Transients on Power Leads</i>

REVISION CHANGES

Dec 14, 2009	A	Release		Christian Rosu
Apr 16, 2010	B	Updated references & CS-11979 addition		Christian Rosu
Apr 22, 2010	C	Updated Test Setup Section		



**FLEXTRONICS
LABORATORY MANAGEMENT SYSTEM**

DOC # 705304-113

REVISION # C

SUPERSEDE B

RELEASE DATE 2010-04-22

DOC TYPE WORK INSTR

EMC LABORATORY
213 Harry Walker Parkway South
NEWMARKET, ON, L3Y 8T3
Tel: 905-952-1242

**IMMUNITY TO TRANSIENTS ON POWER LINES
PULSE #2B TEST PROCEDURE**

END-USER FEEDBACK

very satisfied satisfied neutral dissatisfied very dissatisfied

Please rate your overall satisfaction with this LMS document and input your suggestions or comments.
Your opinion is very important for us.

Survey Date